
TALAY

technology



ABOUT US

COMPANY LOCATION

259 Bangkhuntain Rd. Samaedam Sub district Bangkhuntain District
Bangkok 10150 Thailand.

CONTACT DETAILS

Tel. (+66) 02-416-9884

Fax. (+66) 02-416-2152

AREA

10,000 Square meter

SINCE

21 OCTOBER 2008

CREW

100 People

BUSINESS CATAGORY

Manufacturer and Supplier for Machinery in Food processing industry

PRODUCTS AND SERVICES

- Machinery for **Food** Processing Industry
- Machinery for **Pet Food** Processing Industry



With more than 20 years of experiences in designing and producing Food processing machinery, our company have been consistently received the trust and recognizing from our customers.

Additionally, our research & development team has designed and develop the products regularly to suit the several entrepreneurs' requirements.

Accredited International Quality Management System (ISO 9001:2015)



MISSION

DESIGN

TECHNOLOGY

SERVICE

PARTS

Build trust with customers. We expert in design and manufacture one of the most qualified and efficient machines

- Establish high-quality production
- Continue to improve and develop
- Drive **THAI BRAND** to global market





MISSION

DESIGN

TECHNOLOGY

SERVICE

PARTS






MISSION

DESIGN

TECHNOLOGY

SERVICE

PARTS

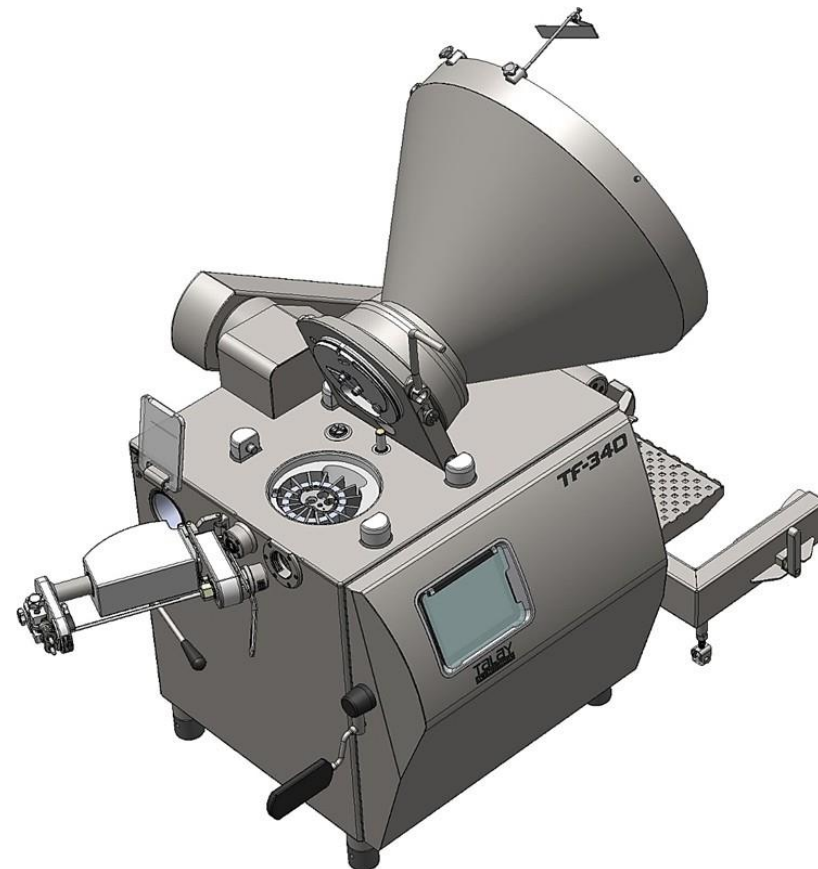



MISSION

DESIGN

TECHNOLOGY

SERVICE

PARTS









MISSION

DESIGN

TECHNOLOGY

SERVICE

PARTS

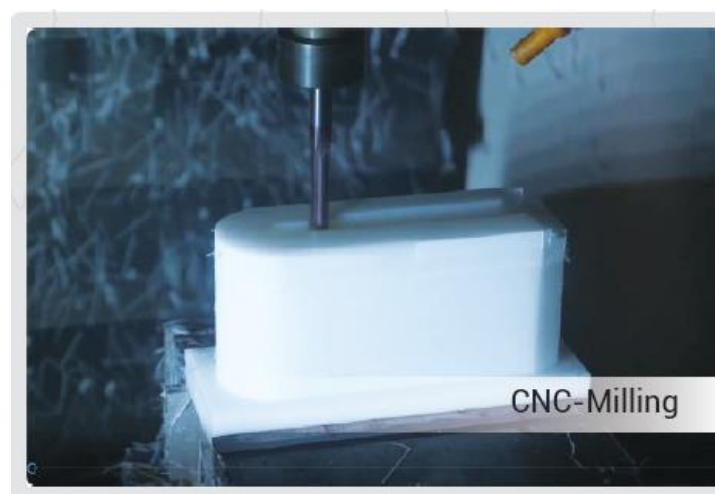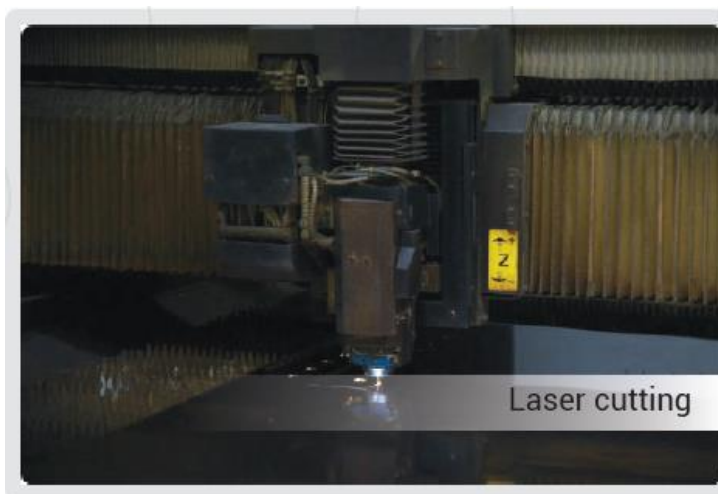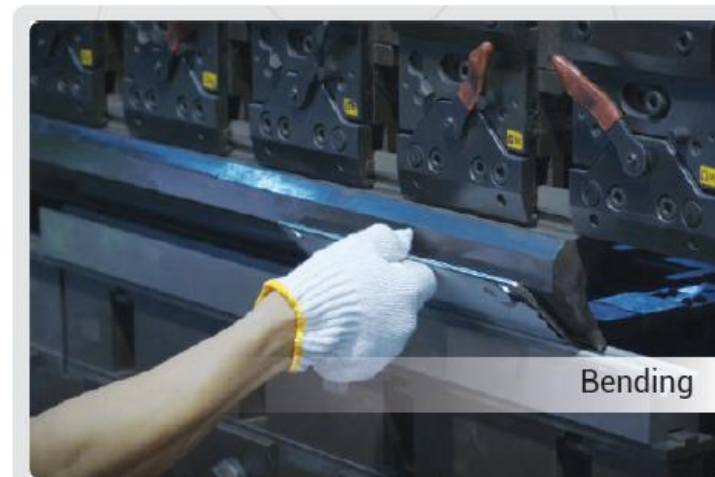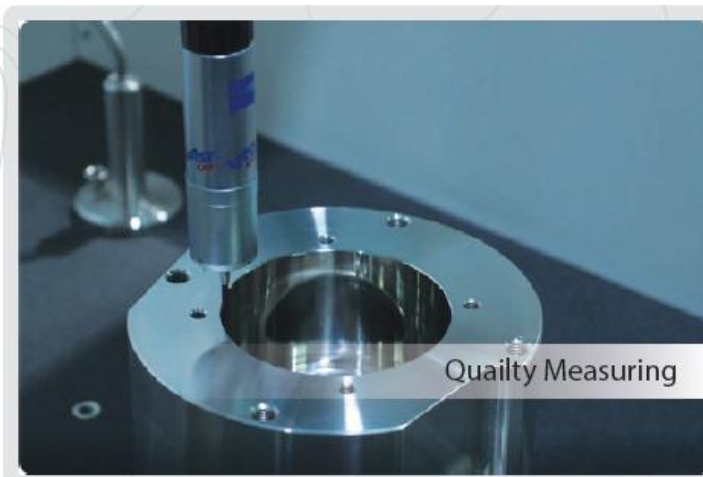



MISSION

DESIGN

TECHNOLOGY

SERVICE

PARTS





MISSION

DESIGN

TECHNOLOGY

SERVICE

PARTS





MISSION

DESIGN

TECHNOLOGY

SERVICE

PARTS





MISSION

DESIGN

TECHNOLOGY

SERVICE

PARTS





MISSION

DESIGN

TECHNOLOGY

SERVICE

PARTS





MISSION

DESIGN

TECHNOLOGY

SERVICE

PARTS





MISSION

DESIGN

TECHNOLOGY

SERVICE

PARTS

Emergency part

Common part

Consumable part





FOODS PROCESSING LINE



TF-130, 235, 340




Vacuum Filler

เครื่องอัดระบบสุญญากาศ



SPECIFICATION

Filling capacity	3500 kg/hr
Filling pressure	40 bar
Hopper volume	max. 300 Litres
Weight	max. 1400 kg.
Portioning cap.	50 ports./min. (40 g.)
Main motor	Servo motor
Twist motor	Servo motor
Linking system	enable
Electrical	380V / 50/60Hz.

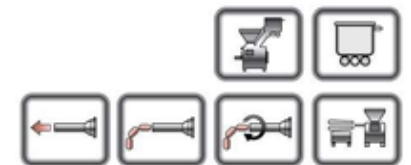



Calibration System

เครื่องปรับแต่งไส้



Hanging system

ระบบราวแขวน



Optional system connecting with Vacuum Filler model ; TF-1 30E, 235, 340





Column loader ခါးဖျက်




SPECIFICATION

Max. Loading cap.	TL-150M : 150 kg. TL-250M : 250 kg.
Meat cart	TL-150M : 120 Liters TL-250M : 200 Liters
Height ranges	1274 / 1474 / 1674 / 1874 mm. 1209 / 1409 / 1609 / 1809 mm.
Power rating	0.75 kW.
Net weight	TL-150M : 400 kg. TL-150M : 450 kg.
Electrical	380V / 50/60Hz.



Adjustable legs



Hoist fork



Swing up unlock





Casing Spooler

เครื่องถrolleyระบบไฟฟ้า



SPECIFICATION

Rubber roller	2 pcs.
Speed roller	Enable adjusting
Torque	Yes
Lowest voltage	24 VDC
Power rating	0.5 kW.
Electrical	220VAC 50/60Hz.



ง่ายต่อการปรับระยะลูกกลิ้งยาง
(Easy adjustable roller)



มีท่อสำหรับทดเปลี่ยนได้
(Replacement pipe)



อุปกรณ์เสริม (Accessories)








Grinder-Meat separator

เครื่องบดแยกกระดูก



SPECIFICATION

Infeed screw	Variable speed
Worm screw	2-3 levels
Hopper vol.	300 / 450 Liter
Screw discharge	Pneumatic
Separator Adjustment	Automatic display
Compressed air connection	6-8 bar
Electrical	380V 50/60Hz.





Slicing machine

เครื่องสไลด์




SPECIFICATION

Cutting speed	250 cut/min.
Slice thickness	1.5 – 350 mm.
Max. input length	700 mm.
Knife motor	Geared motor
Power rating	4.6 kW.
Electrical	380V 50/60Hz.



Touch screen operation



Gripper แบบปรับสับได้



Conveyor belt





Smoke Oven

ตู้อบรมควัน



ใบพัดระบายอากาศ
(Exhaust blower)



ตัวกำเนิดควัน
(Smoke generator)



หน้าจอควบคุมแบบสัมผัส
(Control panel : Touch screen)



หน้าจอควบคุม
(Control panel : Soft touch)

SPECIFICATION

Construction	Stainless steel
Max. No. of door	2 Doors
Max. No. of trolley	6 Trolleys
Max. Capacity	600 kg./batch
Cleaning system	Automatic
Smoke gen	Wood chips
Electrical	380V 50/60Hz.





Intensive Cooling
เครื่องลดอุณหภูมิ




หน้าจอควบคุม
(Control panel : Soft touch)



Option
หน้าจอควบคุมแบบสัมผัส
(Control panel : Touch screen)

SPECIFICATION	
Construction	Stainless steel
Max. No. of door	2 Doors
Max. No. of trolley	6 Trolleys
Max. Capacity	800 kg./batch
Air pressure	5 bar
Weight	2400 kg. (max.)
Electrical	380V 50/60Hz.





Mixer

เครื่องผสม



SPECIFICATION


Hopper Capacity	500 Liter
Mixing capacity	400 Liter
Mixing speed	12-35 RPM
Compressed air connection	5-6 bar
Power rating	6 kW.
Electrical	380V 50/60Hz.



Double paddle shaft



Emptying



Open/Close cover for actuator




CUSTOMER REFERENCE PROJECTS





CUSTOMER REFERENCE PROJECTS



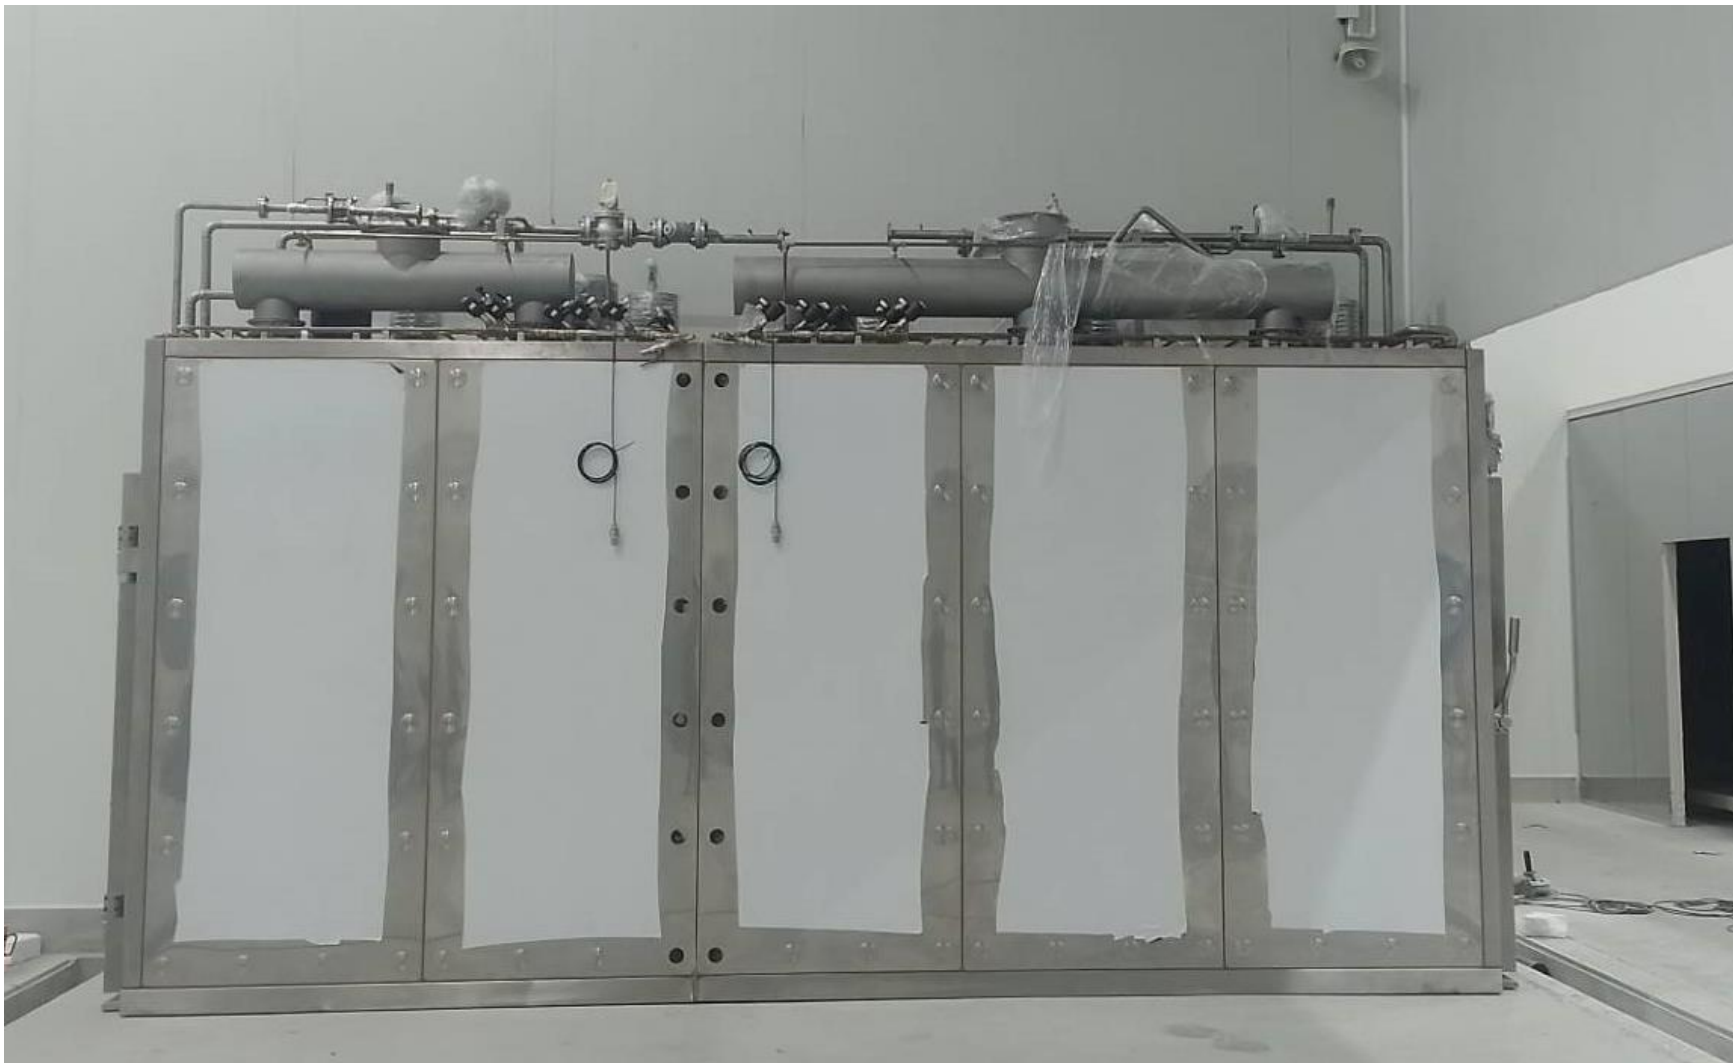

CUSTOMER REFERENCE PROJECTS







EXHIBITION





Our Clients

Talaya
technology



บริษัท เจริญโภคภัณฑ์อาหาร จำกัด (มหาชน)



บริษัท สนิมพันธ์ ฟู้ด จำกัด



NSL FOODS
The Happy Taste Creator





Our Clients

Talay
technology





72 Provinces

With more than **150** projects

Southeast Asia



M E A T

P R O C E S S I N G



Thank you for your attention



Partnerships

ABATTOIR INNOVATIONS

Smarter Solutions for Every Stage of Processing.

Contact Us :

Sales : Mr. Jürgen Löwe

Position : Sales and Service Abattoir Equipment

Contact : +27 72 318 1964

Email : jurgen@abattoirinnovations.com

Website : www.abattoirinnovations.com